






## Kerb Unit **Hinged and Locked** Ductile iron D400, Solid top, Half Batter

Wrekin's BS EN 124:1994 D400 Group 3 hinged kerb unit is designed for carriageways and can be accessed from any position for rodding or cleaning purposes. It is supplied with stainless steel bolts and hinged to prevent theft.



-  For use in a Group 3 Class D400 carriageway environment
-  Manufactured from strong and highly durable ductile iron
-  Captive hinges reduce theft risk whilst allowing easy lifting for gully cleaning
-  All fully comply with BS EN 124:1994 and are Kitemarked by BSI

Wrekin product code	Clear opening size (C x D mm)	Frame depth (mm)	Over frame size (AxB mm)	Base opening (mm)
DGK115/HB/K	500 x 350	150	645 x 445	525 x 370

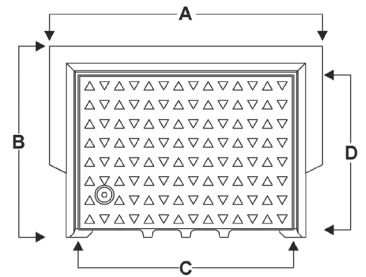

1. Wrekin Products Ltd is continually seeking to improve our products and therefore reserves the right to alter product specifications without prior notice.
2. It is the responsibility of all users to satisfy themselves that the above data is current.
3. Wrekin cannot be held responsible for the performance of these products as conditions of use are beyond our control.
4. Installation details are available on request.